


AD 220

Doosan
Mecc Alte
D+ &



ISO8528	GC,) &
SZUTEST	GC - \$\$\$
CE	

2000/14/EC

&\$\$\$#(#

z) \$ z' z' D:

	"	"	"	"	Amp
400/230	220,00	176,00	200,00	160,00	288,00

fP GDE GC,) &

fDF DE %\$! % %& GC" \$(** z&(GC

Standard Specifications

z

fl ! E

z

z

fl

z

ALTERNATOR

D: A Z' 5JF

fl " E

fP \$\$\$ \$\$\$ E

TRANSFER SWITCH

fl

AD 220

Doosan
Mecc Alte
D+' &'

Manufacturer		Doosan		
Model		P086TI		
		% \$\$\$ "# "		
		% - \$\$\$ "		
		Q* + \$\$\$ < DQ		
	L	8,070		
	"	111X139		
		16,4:1		
	fl # 7	"# "	1500	
	fl 7	L	15,50	
		L	48,50	
AbsorbedAirDischargeReSourceKey.Text	' # "	12,10		
	' # "	250,00		
	' # "	34,00		
	° C	580,00		
		24 V d.c.		
	Load	% \$i	'+) i) \$i
	# "	43,10	31,70	21,10


		Mecc Alte		
		ECO 38 2SN/4		
	Hz	50		
	"	200,00		
7cg'		0,80		
		3		
	fl 7	400/230		
	A	288,00		
Temperature		H		

		fl 7		fl 7	
	"	"	"	"	L
AD 220	1800,00	2688,00	1150,00	1624,00	380,00
		fl 7		fl 7	
	"	"	"	"	L
AK 50	2175	3400	1217	1938	380

AD 220

Doosan
Mecc Alte
D+' &'

1 D+' &'

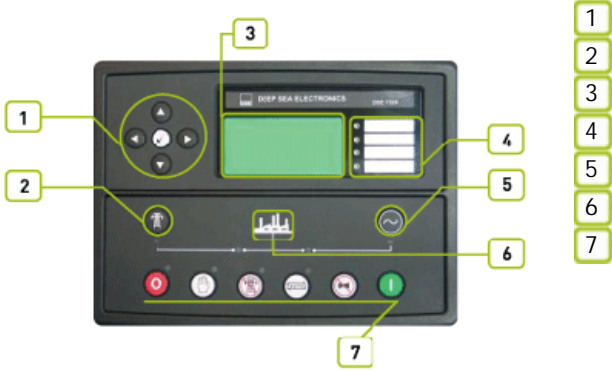

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ž &&\$' ž ž

8G9+' &\$ž 8G9+' &\$ž

ž

% &1 *('

žFG&' &žFG(,) ž

ž

AD 220

Doosan
Mecc Alte
D+' &'

f@z@Bl
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B'*\$-\$)'\$

6G'9B'*\$\$\$!*!&

6G'9B'*\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

)
&(\$)

ž

ž

ž

ž

%, !&*(

"

"

"


"

"

"

AD 220

Doosan
Mecc Alte
D+ &''

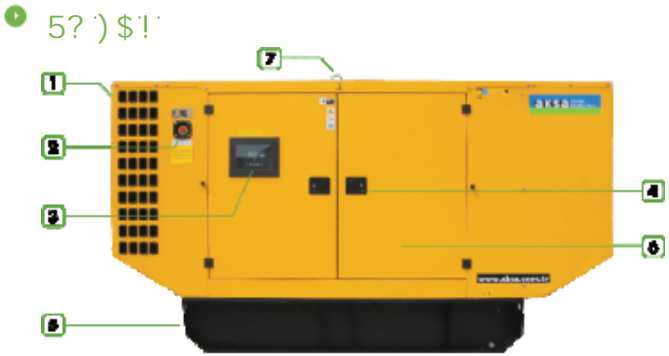

- 1 Steel structures
- 2 Emergency stop push button
- 3 Control panel is right side of the set.
- 4 Corrosion-resistant locks and hinges
- 5 Sump drains valves
- 6 Sound proof foam material
- 7 Lifting Points

	"	1217
fl "L	"	3400
fl "L	"	1938
	L	380