

# AC 110

Cummins  
Mecc Alte  
P 602



ISO8528

GC ; ) &

SZUTEST

GC - \$\$\$

CE

2000/14/EC

&\$\$\$#( #

ž) \$' ž'ž' D:

	"	"	"	"	Amp
400/230	110,00	88,00	100,00	80,00	144,00

fP GDE

GC ; ) &

) & ž

fDF DE

%\$!

%

%&

GC " \$(\*\*

ž&(

GC

ALTERNATOR

TRANSFER SWITCH

# AC 110

Cummins  
Mecc Alte  
P 602

Manufacturer		Cummins														
Model		6BTA 5,9-G5														
		<table border="1"> <tr> <td>% \$\$\$' "# "</td> <td></td> <td></td> <td></td> </tr> <tr> <td>%&amp;Z\$\$' "</td> <td></td> <td></td> <td></td> </tr> <tr> <td>0% +Z\$\$&lt;DQ</td> <td></td> <td></td> <td></td> </tr> </table>			% \$\$\$' "# "				%&Z\$\$' "				0% +Z\$\$<DQ			
% \$\$\$' "# "																
%&Z\$\$' "																
0% +Z\$\$<DQ																
	L	5,900														
	"	102 x 120														
		17,6:1														
	fl # 7	"# "	1500													
	fl 7	L	16,40													
		L	19,80													
AbsorbedAirDischargeReSourceKey.Text	' # "	7,86														
	' # "	216,00														
	' # "	21,42														
	° C	533,00														
		12 V d.c.														
	Load	\$\$\$i	'+)	) \$i												
	# "	25,00	18,00	12,00												

		Mecc Alte		
		ECP34 - 2S/4		
	Hz	50		
	"	105,00		
7 cg'		0,80		
		3		
	fl 7	400/230		
Temperature		H		

		fl 7		fl 7	
	"	"	"	"	L
AC 110	1250,00	2150,00	1050,00	1563,00	240,00
		fl 7		fl 7	
	"	"	"	"	L
AK 40	1600	3100	1057	1670	240



# AC 110

Cummins  
Mecc Alte  
P 602

9B: #9  
9b[ ]bY'gdYYX"  
C]'dfYggi fY"  
7cc'UbhY'a dYfUhi fY"  
F i b' hja Y"  
6UHYfmj c'rg"  
7cbZ[ i fUVY' hja ]b[ "  
; 9B9F 5HCF  
J c' hU[ Y f@ @B' "  
7i fFYbhf@&!@ E"  
: fYei YbVW"  
A 5-BG  
J c' hU[ Y f@ @B' "  
: fYei YbVW"  
A U]bg'fYUXn"  
A U]bg'YbUVYX"  
; Yb"GYhfYUXn"  
; Yb"GYhYbUVYX"

K 5F B-B;  
7\Uf[ Y Z]i fY"  
6UHYfm@ck #][ \ ] c' hU[ Y"  
: U] 'hc' ghcd"  
@ck #][ \ [ YbYfUhc'f] c' hU[ Y"  
I bXYf#j Yf[ YbYfUhc'f ZYei YbVW"  
Cj Yf# bXYf'gdYYX"  
@ck c]'dfYggi fY"  
<][ \ V'c'UbhY'a dYfUhi fY"  
G<I H8CK BG  
: U] 'hc' ghUf"  
9a Yf[ YbVW'ghcd"  
@ck c]'dfYggi fY"  
<][ \ V'c'UbhY'a dYfUhi fY"  
Cj Yf# bXYf'gdYYX"  
I bXYf#j Yf[ YbYfUhc'f ZYei YbVW"  
I bXYf#j Yf[ YbYfUhc'f] c' hU[ Y"  
C]'dfYggi fY'gYbgcf'cdYb"  
7cc'UbhY'a dYfUhi fY'gYbgcf'cdYb"  
9@97 HF =75@HF -D  
: YbYfUhc'f] YfW'fYbH


: 'YI J'V'Y'gYbgcf'WVb VY V'c'bfcc'YX'k ]h' h'Ya dYfUhi fYz  
dfYggi fYz dYfVW'bhU[ Y f'k Ufb]b[ #]i h'Xck b# 'YVW'VW' h'f]dL  
@c'W'gYh]b[ 'dUfUa YHfg'UbX'a cb]h'f]b[ 'Zca 'D7' hc  
V'c'bfcc' a cXi 'Y'k ]h' I G6 V'c'bbYVW]cb'fa Ul '\* 'a H'

9'YVW]VW' GUZYhm#9A 7 'V'a dUfV] ]hm6G'9B '\* \$-) \$  
9'YVW]VW' Vi g]bYgg'Yei ]da YbH  
6G'9B '\*%\$!\*&9A 7 'ja a i b]mighUbXUfX"  
6G'9B '\*%\$!\*( '9A 7 'Ya ]gg]cb'ghUbXUfX

'6UHYfmVUf[ Yf]g'a Ubi ZVW' fYX'k ]h' 'gk ]h'W]b[ !a cXY'UbX'GA 8 'H'V'bc'c[ mUbX'ih\Ug\ ][ \ YZ]VW'YbVW' 6UHYfmVUf[ Yf  
a cXY'gfci hdi hJ !=VUfUWV'f]gh]W]g'j YfmV'cgY'hc'gei UfY'UbX'ci hdi h]g' ]'Ua dYfz% z' ]'Z'f'%&j'c'hUbX'&+Z' ]'Z'f'&'( ]'  
#bdi h% , ' !&\* ( j c'h57 "'Dfc]bY'&(\$) \Ug'Z' 'mici hdi hg\chVW]hdfchVW]cb'UbX'ihVWb'VY'i gYX'Ug'U'W'fYbH'gci fVW"  
Dfc]bY'%&\$) #&(\$) VUf[ Yf'\Ug'\ ][ \ YZ]VW'YbVW'cb[ " ]Z'Z' 'ck ZU]i fY'fUfYz' ][ \ hk Y][ \ hUbX' 'ck \ YUhfUX]UfYX' ]b  
UVV'cfXUbW'k ]h' ]'bYUf'U'fYbUf]j Yg' H\Y'VUf[ Yf]g'Z]h'YX'k ]h' U'dfchVW]cb'X]cXY'UV'cgg'h'Y'ci hdi h'7 cbbYVW'VUf[ Y'Z]  
fY'UmV'c] VY'hk Yyb'dcg]h]j Y'ci hdi hUbX'7: 'ci hdi h' H\Y'mUfY'Yei ]ddYX'k ]h' F: =Z]h'f'hc'fYXi V'Y'YVW]VW'bc]gY'fUX]UfYX  
Zca 'h'Y'XYj ]VW'; Uj Ub]W' m]gc'UfYX' ]bdi hUbX'ci hdi h]m]d]VW'm(\_J 'Z'f'\ ][ \ fY' ]UV] ]m'

# AC 110

Cummins  
Mecc Alte  
P 602

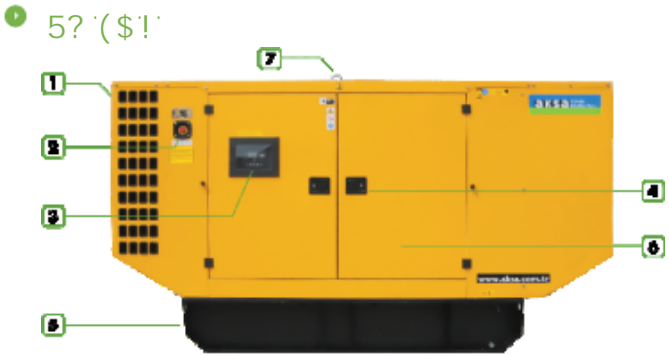

- 1 Steel structures
- 2 Emergency stop push button
- 3 Control panel is right side of the set.
- 4 Corrosion-resistant locks and hinges
- 5 Sump drains valves
- 6 Sound proof foam material
- 7 Lifting Points

	"	1057
fl "L	"	3100
fl "L	"	1670
	L	240